

PHASOR

MARINE

Powered by: Kubota

K3-5.5KW

Standard Features:

- Kubota Diesel Engine
- Single Bearing Direct Coupled Brushless Generator
- $\pm 1\%$ Solid-State Voltage Regulation
- Low 1,800 RPM Operating Speed
- Safety Shutdown System for High Coolant Temperature or Low Lube Oil Pressure
- Single Series Circuit Control System with No Printed Circuit Boards – Tinned Wiring
- Fresh Water Double Pass Heat Exchanger
- Water Cooled Exhaust Manifold with Removable Integral Cupro-Nickel Heat Exchanger Core
- Zinc Anode in Heat Exchanger
- Stainless Steel Exhaust Elbow
- Gear Driven Raw Water Pump
- Four Point Isolation Mounts
- Air Intake Cleaner / Silencer
- Spin-On Lube / Fuel Filters
- RACOR Fuel / Water Separator
- Secondary 5 Micron Fuel Filter
- Self Bleed Fuel System
- USCG Approved Fuel Lines
- Electric Fuel Transfer Pump
- Forged Brass Oil Drain Valve with Safety Lock
- Awl-Craft 2000 Urethane Finish
- 5 Year Limited Warranty

Optional Equipment:

- Main Line Circuit Breaker
- Custom Remote Engine / Generator Instrument Panels
- Stainless Steel Drip Pan
- Three Phase Generator Output
- Custom Front PTO Pulleys
- 24 Volt Starting System
- 50 Cycle Output
- Dedicated Motor Starting Generator Windings
- Sound Insulation Blanket
- Sound Attenuated Enclosure
- Front Belt Guard
- Remote Oil Filter Kits
- Custom Chrome Packages
- Spare Parts Kit




PHASOR
MARINE

K3-5.5KW
Marine Diesel Generators

2880 Hammondville Road • Pompano Beach, FL 33069
PH: (954) 979-5899 • Fax: (954) 979-4349
Website: www.phasormarine.com


Specifications

K3-5.5KW

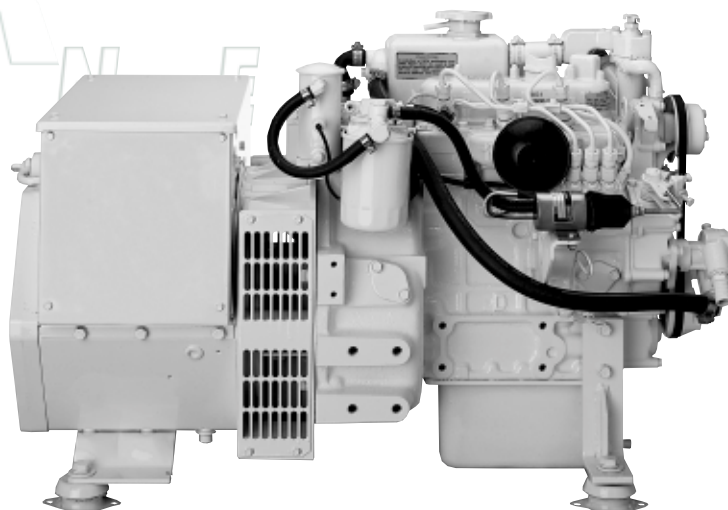

K3-5.5KW 3.75" 24.5" 6"

K3-5.5KW 34.25"

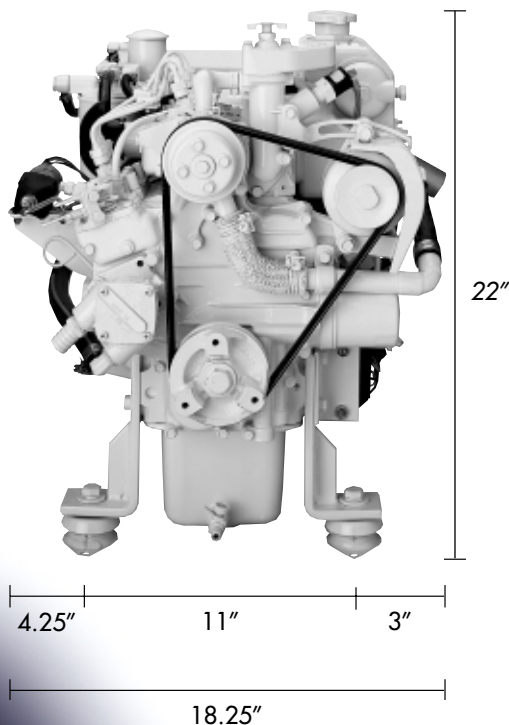

K3-5.5KW

Kubota Model	D722E
Number of Cylinders	3
Cubic Inch Displacement	44
Bore x Stroke	2.64" x 2.68"
Dimensions (LxWxH)	34.25"x18.25"x22"
Weight (lbs)	385
Output (volts)	120/240
Output (amps)	45.8/22.9
Output (watts)	5,500
Exhaust Dia.	1.5"
Raw Water Dia.	3/4"
Fuel Line Dia.	5/16"
Return Line Dia.	3/16"

Note: Specifications are subject to change without notice.